

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/350238890>

Manufacturing Restriction Settings in The Process of Additional Formation of Sheet Metal

Article · March 2021

CITATIONS

0

READS

33

3 authors, including:



Mohammed Salih

Al-Furat Al-Awsat Technical University

8 PUBLICATIONS 3 CITATIONS

[SEE PROFILE](#)



Zuhair Obied

Al-Furat Al-Awsat Technical University

15 PUBLICATIONS 7 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



An Experimental Investigation on Single cylinder S.I-Engine to Improve Its Performance Characteristics [View project](#)



Vibration Analysis of Perforated Composite Sandwich Plate [View project](#)

Manufacturing Restriction Settings in The Process of Additional Formation of Sheet Metal

Haideer Taleb Shomran, Mohammed salih Hassan and Zuhair H.Obiad

Al-Mussaib Technical Institute /Al-Furat Al-Awsat Technical University,51009 Babylon, Iraq

*Corresponding Author Email: had1@atu.edu.iq, hs.muhamad@atu.edu.iq & inm.zoh@atu.edu.iq

ABSTRACT

When performing the actual additional sheet forming procedures, it is expected to be exposed to Tool failure and physical failure. So, the risks should be within their minimums. This research aims to predict material failure as well as tools. The quantitative and hypothetical method was adopted as a controller of the solid formation and weight parts formation. Overlay sheet metal forming strategies define boundaries. The use of progressive sheet materials makes new hard tasks simulate procedures due to the formability of materials strengthens associated with classical steel metal. The following may cause a fractured challenges situation may occur information action, also It has been faced nonharmony case in materials forming possessions supplied by the deferent vendors. Moreover, the other challenge is represented through high interacted stress with high heat throughout formatting processing, which leads to a reduction in the tool's life. The maximum forming ability and the large tendency of formed elastic material to revert before forming leads to inaccuracy of the dimensions in the part that has been formed before.

KEYWORD

compound sheet shaping, strength constituents, physical failure

INTRODUCTION

Extra Sheeting is a new sheet metal used technology in a huge manufacturing field. It is a flexible forming process as preparing to produce modern parts depends on time after taking days in the past. As is the case of some old approaches throughout forming process [1,2]. This action is perfect because it uses pc software drawing (3D-graphics& designing) applications that represent the part that will be produced. It also describes different formation processes [3], compute formation forces, and prediction part defects (crinkles, Ripping, and wrongness in dimensions) [4], so its suggestion rectifying procedures. Accordingly, forming additional sheets is completely feasible in producing prototypes and processes with few production stages. There is no need for manual work, so the repetition (the route is horizontal, but the disadvantage takes a long time, which means more costs [5–8].

BOUNDARY FORMING CURVE AND BORDER DIAGRAM FORMATION

Forming ability can undergo a sheet metal plate to get rid of tearing or twisting while processing the changing surface. It has been find many forms of necks scattered metal sheets [9]. Diffuse neck occurs when stress is high. Stress at the neck is usually known as natural stretching. Whereas the neck's condition is related to the unpredictability width leading to a significant decrease in the width of the leaf near the segmented as a fragment. The neck stress is associated with uniform stretched. Here it is called the "unity axial tensioned effect." Formation Bend Curve is a distortion level curve usually controlled by the specific neck related to the yielding crack. Formation bend curve draws the main effect at the beginning of the located necking for the whole secondary effect values in other loading paths, such as uniaxial [10], isolated scales, and the complete graphics diagram is known as (boundary diagram formation).

Coordination sys of shaping level diagram

shaping level diagram signifies the limitation of formability at coordination sys $\epsilon-1$ and secondary strains $\epsilon-2$, as shown in Fig1-B. Limits of shaping is regularly failure branded by (tearing), which is termed the (limiting curve shaping) [11]. However, it cannot be allowed in normal production conditions up to the local neck: neither from

an aesthetic nor partial functional process. This is the reason for determining the extra boundary curves. Beside the tearing neck reduction as well. The area among fractions and a neck-line diagram is known as (neck as the range of the neck). At a certain level of turbulent stressors, a local paper instability can also occur: this is the wrinkles phenomenon. It is also clear that besides tearing and local Hugging, wrinkles should also be avoided. Draw the formation with these strokes fig1-b. which curves and areas at the bottom of the local neck area Shown, the other area Refers to the safe area for natural conditions of formation in terms of specialization $\epsilon-1$ and secondary $\epsilon-2$ The main stress

The processing

This process is based on stratification, in which the model is divided into horizontal slices. In addition to setting up a computer numeric control to lead the direction of working on the plates. The forming tool is moved along the path of the Numeric controller tools as follows [12]:

1. The tool moves down, touches the plate, and then draws the curves on the horizontal plane [13].
2. The move is made one step down, as shown in the figure above, to draw the next curve and own towards the next step. Furthermore, a plate holder is fixed from the blank side of it during the entire process. Two techniques are used in this forming process:

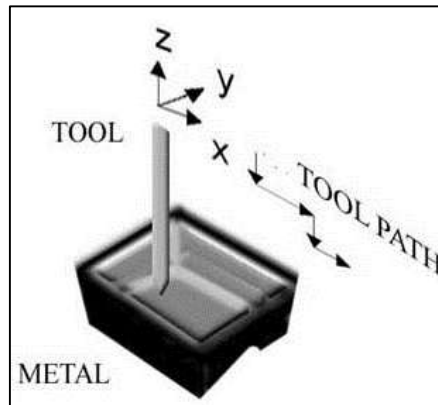


Figure 1. Shaping actions in positive method

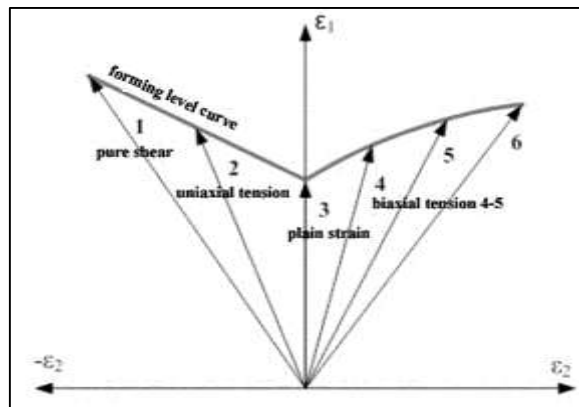


Figure 2. Deferent mode of stress plotters

Negative formation and positive formation, the second is usually the best one, during the industrial applications this formation process is affected by several factors, that may be subject to the following: This process is based on stratification, in which the model is divided into horizontal slices. Besides, the control computer set up with a direction of the work tools on the plates were moved along the path of the tools under the computer control; certain Things were observed during the formation process as follows:

- It is difficult to perform a precision forming process of low depth surfaces and a large radius of curvature and surfaces with a vertical slope.
- Tool of engine usage (depth, efficiency) of formed material, (miles,2007:pp129-135).
- The forming and erection tool (the minimum forming diameter of the surfaces requires specific hardness of the materials to be formed);
- Materials to be formed (extent of formability, springs, for example) in wide usage.

Formation well-known is a well-known boundary graph, and it is completely unlike a curve formed throughout the traditional way as the line appears with an undesirable angle at (+ zone) of simple pressure on the boundary shaping chart. Also, It has been found no typical-roll during the test procedure for determining the modulation boundary arc informing course. However, in the current research, it refers to the Plat's nicking hill criteria, which consider that in the standard axial expansion test [14]. the approximate uniform span is close to being equal with the solid origin n . The spans this to describe the stress at a metallic ligament for the localized plates, assuming that the local neck will form in the zero extension direction. The thickness and effect of homeostasis decrease when the neck forms, i.e., fractures inside the material reach a state where traction increases to zero. The zero extension direction is derived at the angle of the main pressure direction. Therefore, this model is valid at α less than 0, so it could only be used for the left branch of the forming diagram level. Then Hill derived the following standard and expression for the main curve and the minor ones of forming stress.

New lab-experiment plus academic revisions are still under research and development throughout this case study. Where some general ideas for the design of the test are shown for the paths of forming tools and directed to the computer, according to the conditions of expansion, single and two axes. An experimental formula for convergence with a modulation boundary scheme (level formed pro) is used. This can identify two important factors that have been studied in the current research, namely the forces of formation and the ability to form materials. To determine machine tools that can be used, it should be known the force of shaping and the type of metal shaping implement in addition to plate width, which is used throughout--design the process. It determines the material's formability and knows production possibility which could be used in a typical way. In this study, the problems related to the formation by forces were investigated quantitatively and experimentally, where an approximate theoretical solution was proposed. The susceptibility to forming was also performed, as some technical problems of the forming process were addressed.

Factors affecting the process of sheet metal forming

Knowledge of essential powers for (effective procedure) to start shaping process important matter to choose the right equipment, so it will be possible to get rid of (tool-miscarriage). Necessary power for gradual formation must be resolute techniques at work could be found to prevent overloading the tool. As a distinctive holder kit styled equalized loads power. Solid metal support faced important considerable thing especially during the usage while making large-space (from tool to supporter) as minimal as possible [15]. To analyze the forces of formation, a pilot study was conducted as in the illustration. Where the process of measuring the voltage is prepared, and it consists of the forming process equipment for the plates installed above the (pie Zoe-electric) part, The scheme of measure also consists charging galvanizer, and (info-cards order) with computer control going to amplified amount of power for 50 Hz [15].



Figure 3. Measurement using computer control

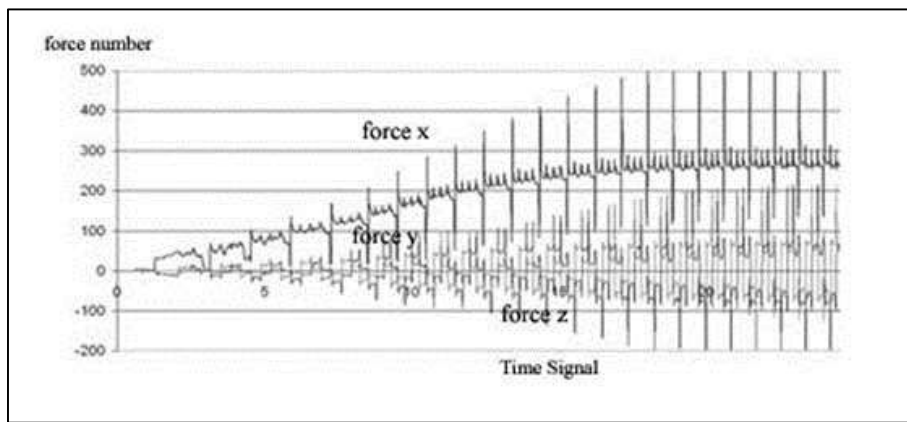


Figure 4. Compound sheeting under power elements

As shown in Fig.4, power outlines in x, y, z coordination differ between each other plate contrast with asymmetric distortion manner, results achieved consistently at the same line in fig 1 The numerical procedures, described in fig3 were improved, and better simulations were achieved. Figure 4 shows the calculated contact forces. The sheet forming process is designed with a certain computer application. In fig4 a simulation similar to the property's material was performed.

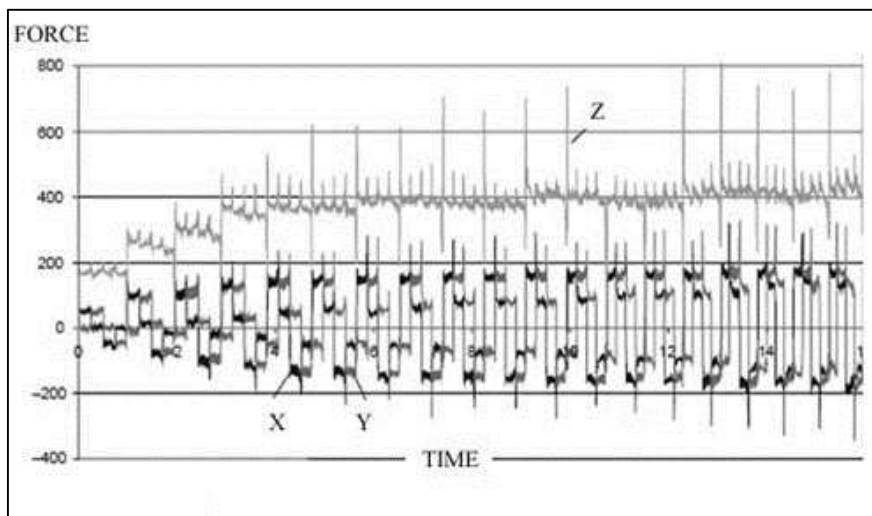


Figure 5. Controlling by computer application upon elements power

Criteria for (variance-tropic) raised with solidification format. (solid factors impact pressures association) that empirically resulted compare (fig. 4-5) demonstrates strength outlines which consistent. .the estimated power over lab one in the experiments that come out from estimated usage to describe stressful conduct in limited component examines exemplary. Likewise, calculation of modulation borders-line was also observed related to experimentally limits, which resulted when the simple exponential relationship (Holloman) was adopted. In, it was proposed that Voce approximation for aluminum. Finite Analyses prototypical upgraded describing the subject matter's stiffness near with polyline. It has been find differences between fig. 4 in and 4 in time-scales which mean relationship could be prepared by looking at (load-curves) It has been recognize that peaks razed after the instrument reached angle position at the top of the pyramid, and then when the tool takes a vertical step down. Here, a simple theoretical model can be developed to estimate the sheet forming process's strength components. The uniform expansion of the sheet metal is assumed under stress conditions of the plane. Neglecting bending and cracking force In our current sheet, It has been saw the last one was to take addicted to account contrast, and improved according to that action, while The second one comes to (Yield-point) measures of the Hill system that used to describe the property variance. The following estimate of T tensile strength has been obtained r [16]:

$$T = 2R_B K \left\{ \frac{[2(1+R)]^{\frac{1}{m}}}{2} \left[1 + \frac{1}{(1+2R)^{\frac{1}{m-1}}} \right]^{\frac{m-1}{m}} \right\} \left[\frac{(1+R)}{(1+2R)} \right]^{\frac{1}{m}} \times \left(\frac{(1+2R)^{\frac{1}{m-1}} + 1}{2} \right)^{\frac{m-1}{m}} t_0 e^{-\epsilon_x} \epsilon_x^n$$

- (Yield-point) standard represented with (k.), and (R.) as (contrast-coefficient-m) while, (K.) is the power factor, and (n.) refers to (exponential-stress).
- The first value (θt) pointed to (Sheet-depth), while (B-R) refer to (span-radius).
- Pressure x ε It is resolute by the formation of the engineering. Computing modes x ε are given. The modulation force components are z-F (vertical) with x-F controlled track of (tool-path).

f – x = tsinf – 2 = t(1 – COS?) [13]. Where T and θ are the tensile strength and the contact angle, respectively. Engineering relationships are provided to assess the contact angle.

- The theoretical analysis determined of forming force components in (Figure-5), The tallness (math-function) swelling (Eng.-Formation) are given which agreeing with Tentative results on Time formation.

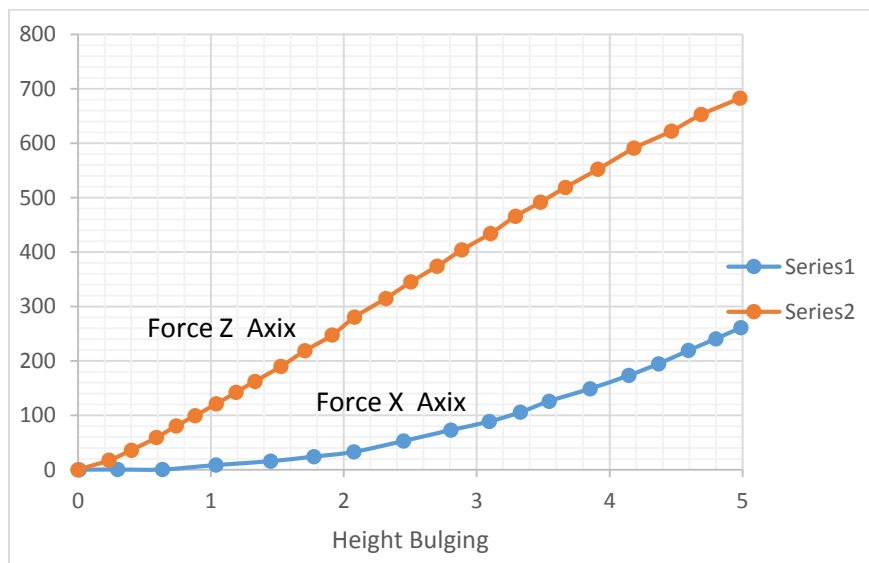


Figure 6. Axes of powers in 2-D Represented in (X, Y)

The components of (shaping power) obtained from theoretical analysis Fig 5, The math-roles of tallness swelling (Eng. formation) are given resultant Tentatively outcomes formation in time [17]. In Fig 6. Forming strength components $\times F$ for different values of plastic The parameter variance is the variance of (R) abstract outcomes coincide at the same line of ieski case that clearly shown in (Figure.7) where the contrast affects material-shape, so the formation force (elements-factors as $X F$) increases with increasing the coefficient of variance R.

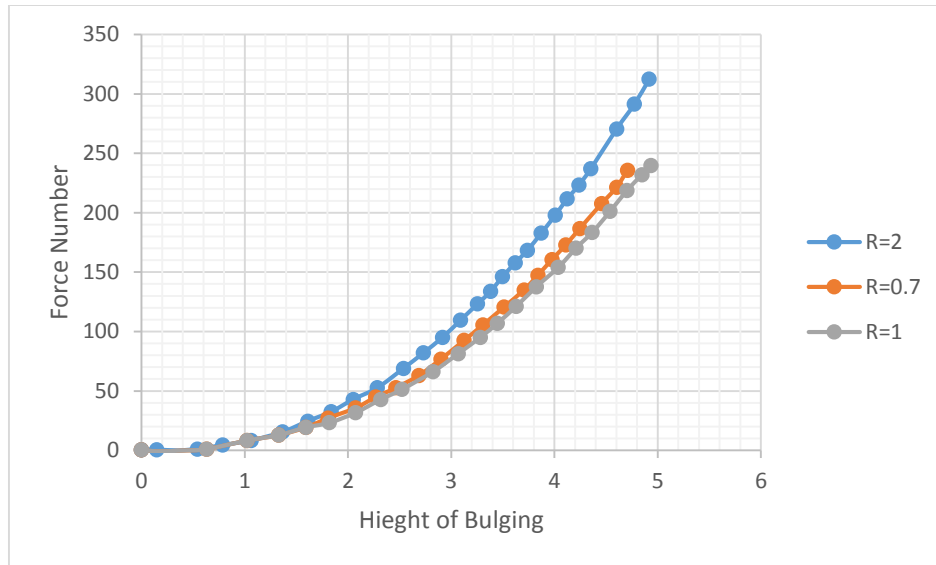


Figure 7. Sheet Variance Shaping Forces

Formation Ability

The formability limit diagram is used as a material estimation tool in the sheet forming process. Formation methods established Distortion type fully, equivalent to a slight (un-negative) stress area of Formability limit diagram. Several formability studies indicate that the Formability limit diagram in the sheet-forming process is quite different. Compare the formability limit diagram to conventional modulation processes (such as un-shallow sketch) with experimental means in a standard scheme for the formability limit diagram. It is a stress Incremental modulation method for straight tracks (with slender exception) according to (circle-rad).

Stresses achieved in the forming process of platelets, Even over 290% Aluminum sheet. According to this, the Formability limit diagram Created for conventional formation operations, which hard (successfully-usage) incremental sheet formability that forced us to use unusual formability by a foundation of a limit diagram. Although machinability is higher in the forming limitation diagram of the plates (upper bounding curve formation is higher), they are more engineering constraints than conventional configuration Techniques like deep drawing. This happens because the altered procedure adopted in (un-shallow) sketching leads to (sheet-dragged) towards mold when the deformation of forming the plates' local materials are not withdrawn to the treatment area. Thus, some Part features are based on section thickness calculation. In order to create the curve level drawing curve, a path in the form of a circular surface mesh with a (three millimeters) fixed diameter

Plate, where formed by the method of synthetic plates, continued until the point of failure of the metal, and that the gradations of the circular pattern determined the specific strain as in Figure 7 where the distortion was near The area of severe bends and sharp corners. It was observed that the results of this laboratory experiment are identical to the curve of the drawn formation level and that deviations in the level of strain from those that have an approximate linear curve have no relationship.

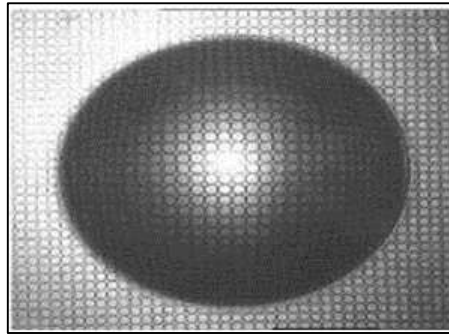


Figure 8. Examine ISF Plate

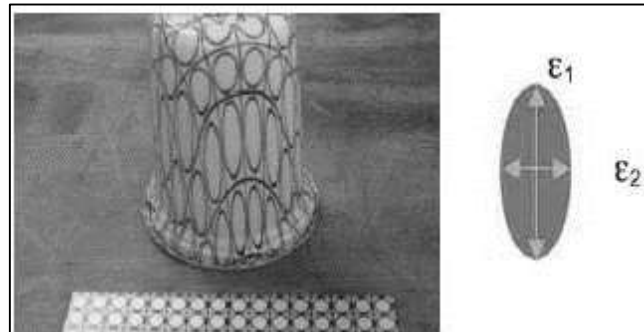


Figure 9. The deformation relation according to the depth

The tension breakdown determined by using the Cockcroft-Latham standard math equation as below:

$$\int_0^{\epsilon_{eq}^{fr}} \frac{\sigma_1}{\sigma_{eq}} d\epsilon_{eq} = C$$

$$\epsilon_1 + \epsilon_2 = \epsilon_{fr}$$

$$\epsilon_1 + C_1 \epsilon_2 = C_2$$

σ_1 is maxed conventional tension, and σ_{eq} and ϵ_{eq} are the same

tension and pressure, regard. Equivalent crack pressure is symbolized by $(\epsilon \frac{fr}{eq})$. this crack pressure and the limited stress matching with the flat stress state seem clear in fig.7. the final result is related to the formula. back to the equation above, we see ϵ_1 -2 represents main and nonminor pressure, and according to the equations above, the conclusion is : if (c-1), (c-2) indicates sheet factors under pressure conditions, the crack pressure found by non-incremental forming is useful for predicting the limitation of pressure in the compound- forming processings. The planned roughly hypothetical model displays the typical harmony with expanded tallness over (two-millimeters) of thickness.

COMMON DRAWBACK TECHNIQUES COULD BE FACED

many problems may be found in this case as:

The huge radius of curving

many problems may be found with steep walls, but there look to be some accuracy problems in thin sides with a huge area of curving. This occurs due to the flexible back fit, which is also debated just before. slighter perpendicular device usage must get rid of forming strong deep looking (surface-strokes) of the sheet, which is recognized throughout fabrication planning operations of the additional sheet metal formation [4].

Ramparts vertical case

In the additional sheet metal formation, the wall draft angle directly affects the rampart's final thickness. If it is "close to zero," the compression state is above the formation boundary curve shown in Fig6, and the material will halt [18]. Generally, aluminum sheets, when used in this case, rampant with a temperature over α 30C, could be produced without any physical defects. Some studies stated that it achieved $\alpha = 0$, but it is still too far to achieve daily industrial action. It has found a serious restraint on sheet metal's additional formation, which eliminates many likely submissions.

The space among instrument and the sheet supporting cases

It is important to know how to leave perfect space (device and fixture) [4]. In case of the following:

- The nonconformity will be too big in high degree spaces.
- Compressed caused when very small space occurred among (device-fixture), leading to (dilation arises). Because the material is not relatively solid, the compacted material in (backing-contact) of the tools (upper-displaced) and boosts tops of forming just like before the supporter, all of that recognized though out the experiments leads to nonconformities (error by millimeters).

The best initial fact for choosing the space measurement is the depth of the first metal sheet.

Difficulties appears inflexible metals

Serious precision problems arise when handling flexible materials, for example, stainless steel. The flexible metal has important effects also. It became so clear if the space between the instrument and the supporter makes distance or formed a sustenance way. After sheet cutting, we may recognize that, especially when removing the large ends. Especially in wide surface sheets, Deflection and deformation accrue and may cause engineering errors exemplified by accumulated millimeters out of required measurement [14]. It has to use additional procedures like heat treatment to eliminate the remaining pressure parts first, then starting cutting procedures.

Forming graphical diagram modeling at high heat

Formability of sheet metal with high temp rise was found during the heat formatting process. Though, empirically decisive the forming diagram in heat formation circumstances is exactly hard, because, shaped graphical diagram plotted dataset its costs time and money at elevated temperatures are much lower compared to the room temp complement [14]. One big complication is the speed of formation or case of the sensitivity of the pressure rate. It can be changed to include the rate of pressure precisely [19].

Forming graphical diagram modeling at Room heat

Formability of sheet metal with pressure through forming diagram drawing at room heat is different in effect between aluminum and other metal during the process (Torikai, 2001: pp180-236).

SHAPING EXPERIMENT(THE LABORATORY HI-TEMP- IMPACT)

Aluminum deformed at a designated between (350-500 °) with a distortion pressure 0.02-1 / surface :

A minute later, The tension path state covers uni-axial, bi-axial, and biaxial stress to decide the shaping diagram plotter for the sheet under 500° (fig10). The two-axis test system can perform pressure capacity by using an indicator set. Factual- effects led to faults – measures of shaping diagram plotter when the resent actual tension with thermo case which throughout our experiment. Constants of aluminum-60-82 Calibrated Substances related to Form-ability as Fig (11).

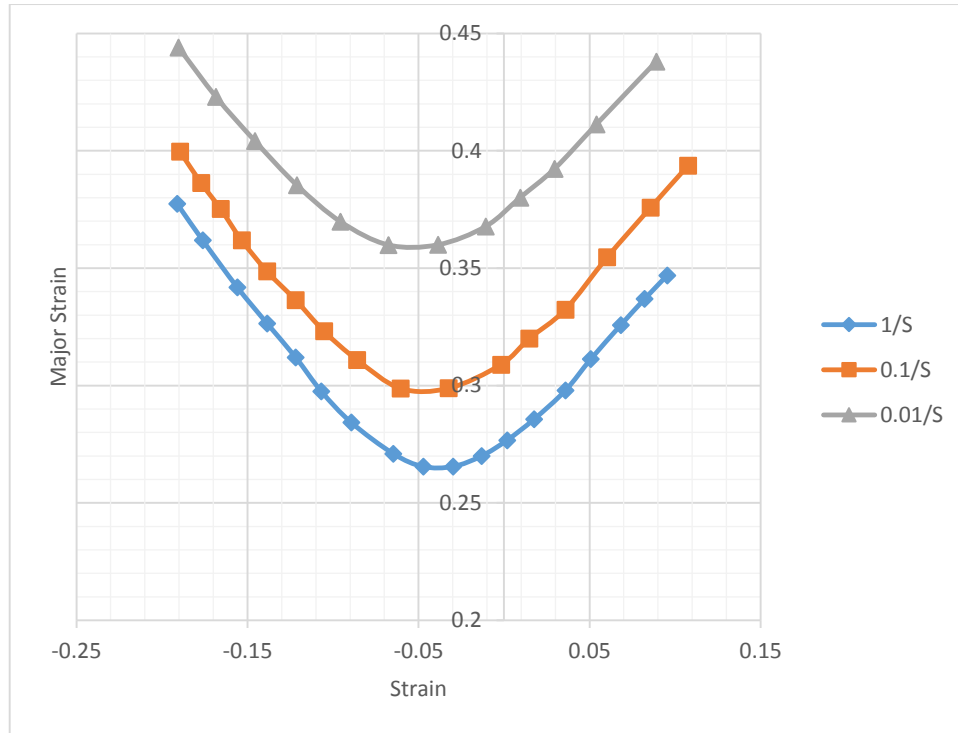


Figure 10. Distortion under tension curves

We determined all Data of the limits of differ-shaping tension of plotted tracks. Thus, arch synthesis's Shaping diagram plotter settings were established when the tension rate increases the specified stress rate from 0.011 / surface to 0.9 / surface of the maxi aluminum-60-82. The modulation limit upsurge greater than 0.11 / surface to 0.9 / surface. A monotonous increase in the regulating TEMP was experienced from 375 ° to 500 ° Centigrade that makes that it was possible to get aluminum-60-82 shaping action under the framework of hi heat satiating circumstances. The limiting diagram specified on the leftward of the shaping plotted diagram is nearby with both ones, which represents an advanced influence toward hi TEMP according to the material beneath the two-axis pressure pathways of tension according to those under the pressure pathways, so higher modulation rapidity with higher heat in the interior of assigned limits are useful for refining the sheet of aluminum -60-82 modulation under hi temperatures circumstances. Temp effect on current tension reaction of aluminum sheet-60-82 the results shows that it has hi –sensitive against heat, and this is common for utmost metals as Fig 10 explains that where current tension numbers at different tension levels for distortion heat (395 445C) centigrade up to 500 centigrade by draw curve line represents logarithm tension in contradiction of inverse-TEMP). The tension degree with difficult decrease as the rise-up temperature proximity specifies that the typical equal initiation energy equation could describe TEMP adoption of flow pressure. However, there was a small linear deviation of the material under low pressure (0.09e show 5) as the table below shows the metal sheet constant depends on shaping forecast under hot quenching shaping:

μ_{11}	μ_{12}	μ_{21}	ϕ_{11}	ϕ_{12}
0.85	451.9	0.15	19.09	874.6
Δ_{11}	Δ_{12}	Δ_{21}	Δ_{22}	γ
79.8	26.1	-81.1	3.52E-3	3.5E-3

When heat-temp is higher (Fig (11) of a microscopic capillary network vibrating, it improves the dislocation movement, thus reducing the flow stress that the metal-sheet needs to pass the initiation barriers.

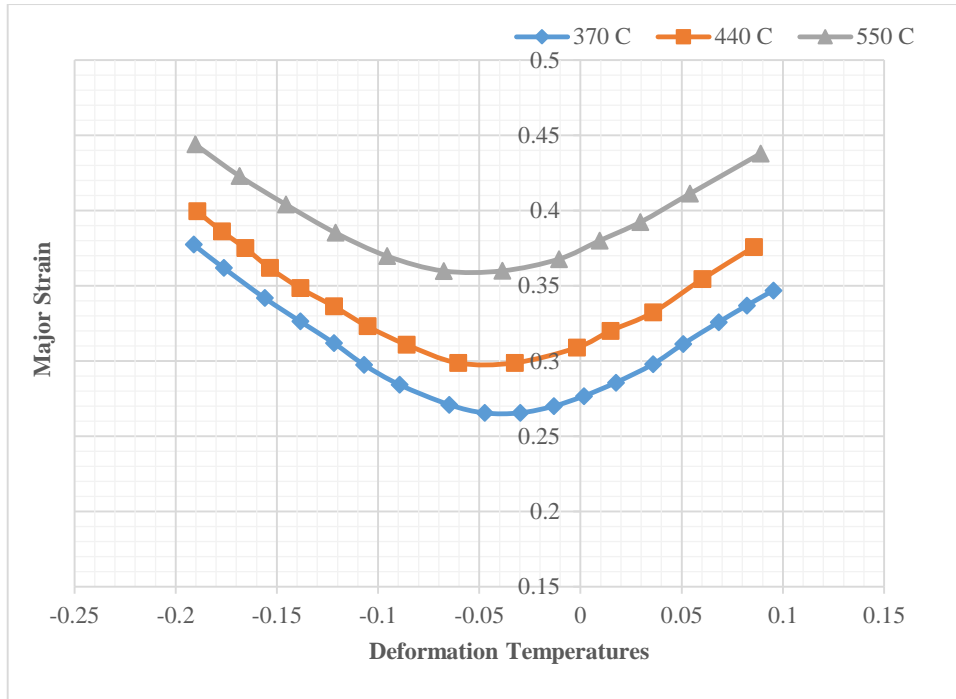


Figure 11. Distortion under temp plotted-curve.

Slip activation of scrap limits and tiny retrieval is further galvanized with enlarged heat-TEMP ductility, which results in Fig- 10 displays this case. When the heat is more than 100 centigrade, the variance between the stretch values is substantial (21%). The sheet metal got high Temperature-sensitive, at a temperature of 500 centigrade, leading to proper shaping action according to the main experiential elongation, which aids shaping action. Fig(12).

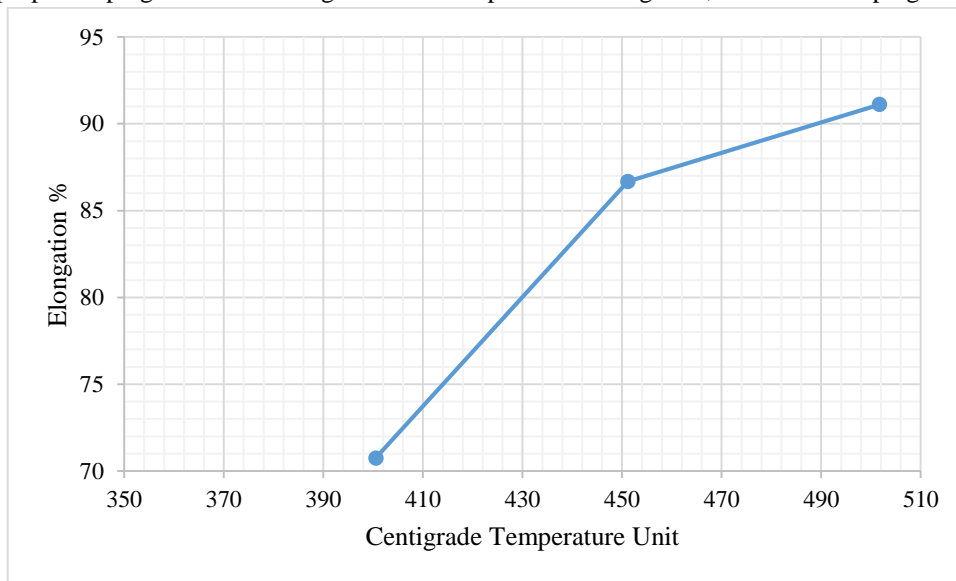


Figure 12. Distortion after elongation via heat increase.

RESULTS DISCUSSING

- Form mode based have been enhanced on sticky- damages based on physics has been established to designate aluminum distortion conduct and forecast of aluminum shaping when hot (stamp-press) circumstances.
- It considers the mechanisms of evolutionary processes driven by displacement processes, such as labor stress, recovery, dynamic and static.
- The effects of stress plus temperature rate on a mechanical, thermal response, and aluminum sheet formation are demonstrated.

- Data from single-axis and biaxial susceptibility experiments were used to calibrate and validate all equations. Specific models give a precise forecast of aluminum-60-82 formation limits, which led to the physical distortion demonstrated according to quenching shaping circumstances.
- The accuracy of specific (shape- forming plotted curve) was evaluated according to the effects of tension plus the ultra-heat rate that occurred from a single-axis thermal tensile assessment.
- Aluminum-60-82 sheet showed high formability in high tension degree experiment that modeling action techniques have been created and could be used to assess thermo-mechanical (tech-details) and the formation of mineral materials under hot stamping conditions.

CONCLUSIONS

The Incremental forming plate model was formulated using computer software. The operations which verified are intended to identify forming graphical diagrams and formation of strength constituents during (compound sheet shaping) operation. Trial and geometric recognized outcomes gained designate through respectable acceptance. The estimated hypothetical perfect originates from estimating the strength parts in bulging heights greater than 2 mm. Innovative additional plate formation plans are indicated to define a graphical diagram of forming result. It turns out that in performed tasks in an axial expansion circumstances, the effect of variability in soft metal variance must be taken into account. However, it is different when It has been tested that using axial expansion circumstances, the hemisphere method in pressing trial could be used in the final engineering of the plate which formed which selected along the lines of conventional forming graphical diagram.

REFERENCES

- [1] M. Kato, K. Ameyama, N. Horikawa, and M. Kawabata, "Special Issue on "Heterogeneous Structure Control: Towards Innovative Development of Metallic Structural Materials", *Tetsu-to-Hagané*, Vol. 105, 2019.
- [2] N.M. Dawood, N.S. Radhi, and Z.S. Al-khafaji, "Investigation Corrosion and Wear Behavior of Nickel-Nano Silicon Carbide on Stainless Steel 316L", Vol. 1002, Pp. 33–43, 2020.
- [3] E. Peled, and S. Menkin, "SEI: past, present and future", *J. Electrochem Soc.*, Vol. 164, Pp. A1703, 2017.
- [4] D.H. Nimbalkar, and V.M. Nandedkar, "Review of incremental forming of sheet metal components", *Int. J. Eng. Res. Appl.*, Vol. 3, Pp. 39–51, 2013.
- [5] N.S. Radhi, and Z. Al-Khafaji, "Investigation biomedical corrosion of implant alloys in physiological environment", *Int. J. Mech. Prod. Eng. Res. Dev.*, Vol. 8, 2018. <https://doi.org/10.24247/ijmperdaug201827>.
- [6] B. Al-Zubaidy, N.S. Radhi, and Z.S. Al-Khafaji, "Study the effect of thermal impact on the modelling of (titanium-titania) functionally graded materials by using finite element analysis", *Int. J. Mech. Eng. Technol.*, 2019.
- [7] N.S. Radhi, M. Marza, and Z.S. Al-Khafaji, "Modification of Nickel-phosphor Electroless Coatings by adding particles of Zirconia", *Solid State Technol*, Vol. 63, 2020.
- [8] I.H. Nayel, M.S. Nasr, and S.Q. Abdulridha, "Impact of elevated temperature on the mechanical properties of cement mortar reinforced with rope waste fibres", *IOP Conf. Ser. Mater. Sci. Eng.*, vol. 671, Pp. 12080, 2020. <https://doi.org/10.1088/1757-899X/671/1/012080>.
- [9] T. Altan, and A.E. Tekkaya, "Sheet metal forming: fundamentals", Asm International, 2012.
- [10] جمع ابراهيم, ثفا سلطان. Study The Effects Of Prestrains In Equibiaxial Stretching On The Forming Limit Diagram Of Aluminum Alloy Sheets (2024 T3). *J Tech.*, Vol. 24, 2011.
- [11] T.J. Kim, and D.Y. Yang, "Improvement of formability for the incremental sheet metal forming process", *Int. J. Mech. Sci.*, Vol. 42, Pp. 1271–86, 2000.
- [12] Z.S. Al-khafaji, N.S. Radhi, and S.A. Mohson, "Preparation and modelling of composite materials (polyester-alumina) as implant in human body", *Int. J. Mech. Eng. Technol.*, Vol. 9, 2018.

- [13] S.B.M. Echrif, and M. Hrairi, “Research and progress in incremental sheet forming processes”, *Mater. Manuf. Process.*, Vol. 26, Pp. 1404–1414, 2011.
- [14] W.J. Ali, and O.T. Jumah, “Warm Forming of Aluminum Alloy 2024 at Different Temperatures”, *Al-Rafadain Eng J.*, Vol. 20, 2012.
- [15] G.M. Goodwin, “Application of strain analysis to sheet metal forming problems in the press shop”, *Sae Trans.*, Pp. 380–387, 1968.
- [16] W.K. Tuama, M.M. Kadhum, N.A. Alwash, Z.S. Al-Khafaji, and M.S. Abdulraheem, “RPC Effect of Crude Oil Products on the Mechanical Characteristics of Reactive-Powder and Normal-Strength Concrete”, *Period Polytech Civ Eng.*, 2020. <https://doi.org/10.3311/ppci.15580>.
- [17] G. Zhang, Z.H. Ali, M.S. Aldlemy, M.H. Mussa, S.Q. Salih, and M.M. Hameed, “Reinforced concrete deep beam shear strength capacity modelling using an integrative bio-inspired algorithm with an artificial intelligence model”, *Eng. Comput.*, 2020:1–14, 2020.
- [18] J. Hu, Z. Marciniak, and J. Duncan, “Mechanics of sheet metal forming”. Elsevier; 2002.
- [19] N. Smyth, “Effect on Fatigue Performance of Residual Stress induced via Laser Shock Peening in Mechanically Damaged 2024- T351 Aluminium Sheet”, 2014.